



IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF: :
KAZUO SATO, ET AL. : EXAMINER: DIAMOND, A. D.
SERIAL NO.: 10/826,290 :
FILED: APRIL 19, 2004 : GROUP ART UNIT: 1753
FOR: SUBSTRATE WITH :
TRANSPARENT CONDUCTIVE :
OXIDE FILM, PROCESS FOR :
ITS PRODUCTION AND :
PHOTOELECTRIC :
CONVERSION ELEMENT :

DECLARATION

COMMISSIONER FOR PATENTS

ALEXANDRIA, VIRGINIA 22313

SIR:

Now comes TOMOKO CHIBA who deposes and says:

That my name is TOMOKO CHIBA;

That my address is 3-26 Naka-aoki 1-chome, Kawaguchi-shi,
Saitama-ken, Japan;

That I know well both the English and Japanese languages;

That the attached English language translation is true and
correct translation of Japanese Patent Application No. 2001-322552 filed on
October 19, 2001 to the best of my knowledge and belief;

I hereby declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

FURTHER DEPONENT SAITH NOT.

June 28, 2006
Date

Tomoko Chiba
TOMOKO CHIBA

Date of Application: October 19, 2001

Application Number: Japanese Patent Application
No. 2001-322552

Applicant(s): Asahi Glass Company, Limited

【Type of Document】 PETITION FOR PATENT APPLICATION
【Reference No.】 AG20010566
【Filing Date】 October 19, 2001
【Addressee】 Commissioner, Patent Office
【International Patent Classification】 H01L 31/04
【Inventor(s)】
 【Name】 Kazuo Sato
 【Address or Residence】 Asahi Glass Company, Limited
 1150, Hazawa-cho, Kanagawa-ku,
 Yokohama-shi, Kanagawa
【Inventor(s)】
 【Name】 Naoki Taneda
 【Address or Residence】 Asahi Glass Company, Limited
 1150, Hazawa-cho, Kanagawa-ku,
 Yokohama-shi, Kanagawa
【Inventor(s)】
 【Name】 Makoto Fukawa
 【Address or Residence】 Asahi Glass Company, Limited
 1150, Hazawa-cho, Kanagawa-ku,
 Yokohama-shi, Kanagawa
【Inventor(s)】
 【Name】 Nobutaka Aomine
 【Address or Residence】 Asahi Glass Company, Limited
 1150, Hazawa-cho, Kanagawa-ku,
 Yokohama-shi, Kanagawa
【Inventor(s)】
 【Name】 Mika Kambe
 【Address or Residence】 Asahi Glass Company, Limited
 1150, Hazawa-cho, Kanagawa-ku,
 Yokohama-shi, Kanagawa

【Patent Applicant(s)】

【Identification No.】 000000044

【Name or Company Name】 Asahi Glass Company, Limited

【Representative(s)】

【Identification No.】 100080159

【Patent Attorney】

【Name or Company Name】 Mochitoshi Watanabe

【Representative(s)】

【Identification No.】 100090217

【Patent Attorney】

【Name or Company Name】 Haruko Miwa

【Identification of Fees】

【Prepayment account No.】 006910

【Amount of Payment】 21,000 yen

【List of Submitted Items】

【Name of item】 Specification 1

【Name of item】 Drawings 1

【Name of item】 Abstract 1

【Burden of Proof】 Yes

- 1 -

【TYPE OF DOCUMENT】 SPECIFICATION

【TITLE OF THE INVENTION】

SUBSTRATE WITH TRANSPARENT CONDUCTIVE OXIDE FILM,
PROCESS FOR ITS PRODUCTION AND PHOTOELECTRIC
5 CONVERSION ELEMENT

【SCOPE OF THE CLAIM(S)】

【Claim 1】

A substrate with a transparent conductive oxide film,
comprising a substrate and a transparent conductive oxide
10 film provided on the substrate and constituted by a
plurality of ridges and a plurality of flat portions,
wherein the surfaces of the ridges and the flat portions
have many continuous micron-size protrusions.

【Claim 2】

15 The substrate with a transparent conductive oxide
film according to Claim 1, wherein the protrusions have
basal plane diameters of from 0.1 to 0.3 μm and
height/basal plane diameter ratios of from 0.7 to 1.2.

【Claim 3】

20 A substrate with a transparent conductive oxide film,
comprising a substrate and a transparent conductive oxide
film provided on the substrate, wherein the substrate
with the transparent conductive oxide film, has a haze of
from 10 to 95% over a full wavelength region of from 400
25 to 800 nm, and the difference of the absolute values
between the maximum value and the minimum value of the

haze (the maximum value - the minimum value) is not more than 50%.

[Claim 4]

The substrate with a transparent conductive oxide
5 film according to Claim 3, wherein the substrate with the transparent conductive oxide film, has a haze of from 40 to 70% (as an average of from 400 to 600 nm) in a wavelength region of from 400 to 600 nm and a haze of from 20 to 40% (as an average of from 600 to 800 nm) in a
10 wavelength region of from 600 to 800 nm.

[Claim 5]

A substrate with a transparent conductive oxide film, comprising a substrate and a transparent conductive oxide film provided on the substrate, wherein the transparent
15 conductive oxide film comprises discontinuous small ridges made of a first oxide and a continuous layer made of a second oxide, formed on the small ridges, wherein the surface of the continuous layer has many continuous micron-size protrusions.

20 **[Claim 6]**

The substrate with a transparent conductive oxide film according to any one of Claims 1 to 5, wherein the substrate with the transparent conductive oxide film, has a sheet resistance of from 8 to 20 Ω/\square and an optical
25 transmittance of from 80 to 90% at 550 nm measured by an immersion liquid method.

[Claim 7]

The substrate with a transparent conductive oxide film according to Claim 5, wherein the small ridges have basal plane diameters of from 0.2 to 2.0 μm .

5 **[Claim 8]**

The substrate with a transparent conductive oxide film according to Claim 5, wherein the first oxide is composed of SnO_2 or SnO_2 containing fluorine, the fluorine content being not more than 0.01 mol% based on
10 SnO_2 .

[Claim 9]

The substrate with a transparent conductive oxide film according to any one of Claims 5 to 8, wherein the second oxide is a transparent conductive oxide containing
15 at least one member selected from the group consisting of SnO_2 , ZnO and In_2O_3 .

[Claim 10]

The substrate with a transparent conductive oxide film according to any one of Claims 5 to 9, wherein the
20 second oxide is SnO_2 containing fluorine-doped tin as the main component, contains fluorine in an amount of from 0.01 to 4 mol% based on SnO_2 and has a conductive electron density of from 5×10^{19} to $4 \times 10^{20} \text{ cm}^{-3}$.

[Claim 11]

25 The substrate with a transparent conductive oxide film according to any one of Claims 5 to 10, wherein a film made of an oxide different in the composition from

the first and second oxides, is formed between the discontinuous small ridges made of the first oxide and the continuous layer made of the second oxide.

[Claim 12]

5 The substrate with a transparent conductive oxide film according to Claim 11, wherein the first oxide is SnO_2 , the different oxide is SiO_2 , and the second oxide is fluorine-doped SnO_2 .

[Claim 13]

10 The substrate with a transparent conductive oxide film according to Claim 1, 2, 5, 6, 7, 8, 9, 10, 11 or 12, wherein the substrate with the transparent conductive oxide film, has a haze of from 10 to 95% over a full wavelength region of from 400 to 800 nm.

15 **[Claim 14]**

A process for producing the substrate with the transparent conductive oxide film as defined in any one of Claims 1 to 13, which comprises forming, on a transparent substrate, discontinuous small ridges made of
20 a first oxide by an atmospheric pressure CVD method, and forming thereon a continuous layer made of a second oxide.

[Claim 15]

The process for producing the substrate with the transparent conductive oxide film according to Claim 14,
25 wherein the small ridges are formed by an atmospheric pressure CVD method employing tin tetrachloride, water and hydrogen chloride.

[Claim 16]

The process for producing the substrate with the transparent conductive oxide film according to Claim 14, wherein the continuous layer made of the second oxide is
5 formed on the discontinuous small ridges made of the first oxide, by an atmospheric pressure CVD method.

[Claim 17]

The process for producing the substrate with the transparent conductive oxide film according to Claim 16,
10 wherein a film made of an oxide different in the composition from the first and second oxides, is formed between the discontinuous small ridges made of the first oxide and the continuous layer made of the second oxide, by an atmospheric pressure CVD method.

15 **[Claim 18]**

A photoelectric conversion element having a rear face electrode, via a photoelectric conversion layer, on the substrate with the transparent conductive oxide film as defined in any one of Claims 1 to 13.

20 **[Claim 19]**

The photoelectric conversion element according to Claim 18, wherein the photoelectric conversion layer is a layer having p-, i- and n-type-layers formed in this order.

25 **[Claim 20]**

The photoelectric conversion element according to Claim 18, wherein the rear face electrode is a metal film

containing Ag in an amount of at least 95 mol% in the film.

[Claim 21]

The photoelectric conversion element according to
5 Claim 20, wherein the metal film contains Pd or Au in an amount of from 0.3 to 5 mol% in the film.

[Claim 22]

The photoelectric conversion element according to
any one of Claims 18 to 21, which has a contact-improving
10 layer between the rear face electrode and the n-type-layer nearest to the rear face electrode, between the photoelectric conversion layer and the rear face electrode.

[Claim 23]

15 The photoelectric conversion element according to Claim 22, wherein the contact-improving layer has a resistivity of not more than $1 \times 10^{-2} \Omega \cdot \text{cm}$.

[Claim 24]

The photoelectric conversion element according to
20 Claim 22 or 23, wherein the contact-improving layer has an absorption coefficient of not more than $5 \times 10^3 \text{ cm}^{-1}$ in a wavelength region of from 500 to 800 nm.

[Claim 25]

The photoelectric conversion element according to
25 any one of Claims 22 to 24, wherein the contact-improving layer contains zinc oxide (ZnO) as the main component, and at least 90 atomic % of the total metal component in

the layer is Zn.

[Claim 26]

The photoelectric conversion element according to Claim 25, wherein the layer containing ZnO as the main component, contains Ga or Al in an amount of from 0.3 to 10 mol% based on the summation with Zn.

[DETAILED DESCRIPTION OF THE INVENTION]

[Technical Field to which the Invention Belongs]

The present invention relates to a substrate with a transparent conductive oxide film, a process for its production and a photoelectric conversion element (especially a solar cell) employing the substrate.

[Prior Art]

Thin-film solar cells being photoelectric conversion elements may, for example, be of an amorphous silicon (a-Si) type or a polycrystalline silicon type. In such thin-film silicon type solar cells, a transparent conductive oxide film is used as an incident light side electrode. Such a transparent conductive oxide film is required to have a low resistance and high transparency and to have a high light scattering performance in order to increase the photoelectric conversion efficiency. JP-B-7-105166 discloses a fluorine-doped SnO_2 film which contains fluorine in an amount of from 0.01 to 4 mol% based on SnO_2 and which has a conductive electron density of from 5×10^{19} to $4 \times 10^{20} \text{ cm}^{-3}$, and the film has a low absorbance, is highly transparent and further has high

durability against an active hydrogen species.

JP-B-6-12840 discloses a transparent conductive film which has a surface roughness (texture) structure and has an effect to scatter incident light within a

- 5 photoelectric conversion unit, whereby as compared with a transparent conductive film having a small surface roughness, the photoelectric conversion efficiency of an amorphous silicon solar cell can be made high.

- On the other hand, in the case of a thin-film
10 crystalline silicon solar cell such as a thin film polycrystalline silicon or a thin-film microcrystalline silicon which has been actively studied in recent years, the cell sensitivity in a long wavelength region is high as compared with an amorphous silicon solar cell. This
15 indicates that as compared with an amorphous silicon type, a light scattering property and a high transparency in a longer wavelength region, are required for the transparent conductive film. In order to increase light scattering at a long wavelength, it is effective to
20 further increase the surface roughness structure of the transparent conductive film. For example, if the film thickness is made thick, the crystal grain size will be increased, whereby the surface roughness can be increased. However, a transparent conductive film such as a
25 fluorine-doped SnO_2 film has light absorption in a long wavelength region by free electrons, whereby if the film is made thick, the light absorption increases, whereby

the optical transmittance decreases. Consequently, even if light scattering on a long wavelength side is increased by increasing the surface roughness, light absorption of a long wavelength will also increase, 5 whereby as a whole, the photoelectric conversion efficiency of the solar cell will not increase, and it has been difficult to increase the efficiency of the photoelectric conversion by means of a transparent conductive film having a high spectral haze value (which 10 may hereinafter be referred to simply as "a haze").

Other than the above, a technique to increase the light scattering effect by controlling the surface roughness of a transparent conductive film in contact with the photoelectric conversion layer, has heretofore 15 been well known and is disclosed in e.g. JP-A-3-125481, JP-A-2000-252500, JP-A-61-288314, JP-A-61-288473, JP-A-61-288314 or JP-A-2000-232234.

In JP-A-3-125481 among them, a transparent electrode substrate is disclosed which is characterized by a 20 structure wherein a first layer having a large average particle size and a second layer having a small average particle size are laminated. This is designed to refract and scatter light with a long wavelength by the first layer having a large average particle size and light with 25 a short wavelength by the second layer having a small average particle size, in order to let more light be absorbed by the photoelectric conversion layer. However,

with the electrode structure disclosed in Examples, both the first and second layers are transparent conductive films, whereby absorption by free electrons can not be avoided. Namely, incident light will pass through the
5 first layer film of at least $1.0\ \mu\text{m}$ over the entire region of the substrate surface and will further pass through the second layer film of at least $0.2\ \mu\text{m}$, whereby as a whole, absorption by films of at least $1.2\ \mu\text{m}$ will take place. Accordingly, attenuation of light before
10 reaching the photoelectric conversion layer can not be avoided. Thus, it has been found that with the construction of the substrate as disclosed in JP-A-3-125481, no significant improvement can be obtained in the photoelectric conversion efficiency.

15 Further, JP-A-2000-252500 also discloses a transparent electrode substrate for a silicon thin-film type photoelectric conversion device, wherein a first transparent conductive film having a large difference in the surface roughness, is formed on a glass substrate,
20 and a second transparent conductive film having a small difference in the surface roughness, is formed thereon. It is stated that by reducing the difference in roughness of the second transparent conductive film to make the surface smooth, spike-like protrusions can be eliminated,
25 whereby short circuiting of junctions in the photoelectric conversion unit can be reduced, and thus fluctuation of the performance of the photoelectric

conversion device can be reduced. However, it has been found that also this transparent electrode substrate has a drawback that, like the above-mentioned problem, as light will pass through absorptive two layers of transparent conductive films (continuous films), the amount of incident light to the photoelectric conversion layer will be reduced by an amount absorbed by the conductive films, whereby the photoelectric conversion efficiency will not be improved.

Further, JP-A-61-288314 and JP-A-61-288473 disclose that with a transparent electrode film represented by indium/tin oxide or SnO_2 formed by a conventional electron beam vapor deposition method, a vacuum vapor deposition method, a sputtering method, a CVD method or a spray method, the difference in the surface roughness is from about 20 to 100 nm, and the distance between protrusions is from about 50 to 200 nm, whereby the light scattering effect at the interface with the photoelectric conversion layer is inadequate. Whereas, it is disclosed possible to increase the light scattering effect at the interface and to increase the photoelectric conversion efficiency by carrying out chemical etching treatment of the transparent electrode film surface to form a roughened surface having a difference in roughness of from about 100 to 500 nm and a distance between protrusions of from about 200 to 1000 nm. However, this system requires to carry out chemical etching treatment

after forming the transparent electrode films and to sufficiently clean and dry the substrate in order to remove the etching solution and then to form the photoelectric conversion layer, whereby the process tends
5 to be cumbersome, and there is a problem that the productivity is low.

Further, JP-A-2000-232234 discloses that a photoelectric conversion device having a transparent electrode wherein the difference in surface roughness is
10 from 10 to 100 nm and the pitch of surface roughness is larger than the difference in the surface roughness and not larger than 25 times thereof, will have the photoelectric conversion characteristics improved by a light-trapping effect, without bringing about a decrease
15 of an open circuit voltage or a decrease of the production yield. However, the means to realize the surface roughness in this process is chemical etching like in the above-mentioned cases, whereby the process tends to be cumbersome, and there will be a problem in
20 mass production.

[Problems that the Invention is to Solve]

The present invention has been made to solve such problems of the prior art. It is an object of the present invention to provide a substrate with a
25 transparent conductive oxide film (especially a substrate with a transparent conductive oxide film useful as a substrate for a thin film silicon type solar cell) which

has a low resistance, a high transparency and a characteristic of having a good light scattering performance over a full wavelength region (from 300 nm to 3 μ m) of solar ray and which is excellent in mass productivity, a process for its production, and a photoelectric conversion element (especially a solar cell) employing such a substrate.

[Means of Solving the Problems]

The above object can be accomplished by using such a substrate with a transparent conductive oxide film provided by the present invention. Namely, the present invention is as follows.

(1) A substrate with a transparent conductive oxide film, comprising a substrate and a transparent conductive oxide film provided on the substrate and constituted by a plurality of ridges and a plurality of flat portions, wherein the surfaces of the ridges and the flat portions have many continuous micron-size protrusions.

The heights of the ridges are preferably from 0.2 to 2.0 μ m, and the pitches between the ridges (the distances between the tops of adjacent ridges) are linearly preferably from 0.1 to 2.0 μ m.

(2) The substrate with a transparent conductive oxide film according to the above (1), wherein the protrusions have basal plane diameters of from 0.1 to 0.3 μ m and height/basal plane diameter ratios of from 0.7 to 1.2.

(3) A substrate with a transparent conductive oxide film,

comprising a substrate and a transparent conductive oxide film provided on the substrate, wherein the substrate with the transparent conductive oxide film, has a haze of from 10 to 95% over a full wavelength region of from 400 to 800 nm, and the difference of the absolute values between the maximum value and the minimum value of the haze (the maximum value - the minimum value) is not more than 50%.

(4) The substrate with a transparent conductive oxide film according to the above (3), wherein the substrate with the transparent conductive oxide film, has a haze of from 40 to 70% (as an average of from 400 to 600 nm) in a wavelength region of from 400 to 600 nm and a haze of from 20 to 40% (as an average of from 600 to 800 nm) in a wavelength region of from 600 to 800 nm.

(5) A substrate with a transparent conductive oxide film, comprising a substrate and a transparent conductive oxide film provided on the substrate, wherein the transparent conductive oxide film comprises discontinuous small ridges made of a first oxide and a continuous layer made of a second oxide, formed on the small ridges, wherein the surface of the continuous layer has many continuous micron-size protrusions.

(6) The substrate with a transparent conductive oxide film according to any one of the above (1) to (5), wherein the substrate with the transparent conductive oxide film, has a sheet resistance of from 8 to 20 Ω/\square

and an optical transmittance of from 80 to 90% at 550 nm measured by an immersion liquid method.

- (7) The substrate with a transparent conductive oxide film according to the above (5), wherein the small ridges
5 have basal plane diameters of from 0.2 to 2.0 μm .

The first oxide is preferably transparent.

- (8) The substrate with a transparent conductive oxide film according to the above (5), wherein the first oxide is composed of SnO_2 or SnO_2 containing fluorine, the
10 fluorine content being not more than 0.01 mol% based on SnO_2 .

The second oxide is preferably transparent.

The second oxide preferably has electrical conductivity.

- 15 (9) The substrate with a transparent conductive oxide film according to any one of the above (5) to (8), wherein the second oxide is a transparent conductive oxide containing at least one member selected from the group consisting of SnO_2 , ZnO and In_2O_3 .
- 20 (10) The substrate with a transparent conductive oxide film according to any one of the above (5) to (9), wherein the second oxide is SnO_2 containing fluorine-doped tin as the main component, contains fluorine in an amount of from 0.01 to 4 mol% based on SnO_2 and has a
25 conductive electron density of from 5×10^{19} to $4 \times 10^{20} \text{ cm}^{-3}$.
- (11) The substrate with a transparent conductive oxide film according to any one of the above (5) to (10),

wherein a film made of an oxide different in the composition from the first and second oxides, is formed between the discontinuous small ridges made of the first oxide and the continuous layer made of the second oxide.

- 5 (12) The substrate with a transparent conductive oxide film according to the above (11), wherein the first oxide is SnO_2 , the different oxide is SiO_2 , and the second oxide is fluorine-doped SnO_2 .

- 10 (13) The substrate with a transparent conductive oxide film according to the above (1), (2), (5), (6), (7), (8), (9), (10), (11) or (12), wherein the substrate with the transparent conductive oxide film, has a haze of from 10 to 95% over a full wavelength region of from 400 to 800 nm.

- 15 (14) A process for producing the substrate with the transparent conductive oxide film as defined in any one of the above (1) to (13), which comprises forming, on a transparent substrate, discontinuous small ridges made of a first oxide by an atmospheric pressure CVD method, and
20 forming thereon a continuous layer made of a second oxide.

- (15) The process for producing the substrate with the transparent conductive oxide film according to the above (14), wherein the small ridges are formed by an atmospheric pressure CVD method employing tin
25 tetrachloride, water and hydrogen chloride.

- (16) The process for producing the substrate with the transparent conductive oxide film according to the above

(14), wherein the continuous layer made of the second oxide is formed on the discontinuous small ridges made of the first oxide, by an atmospheric pressure CVD method.

(17) The process for producing the substrate with the transparent conductive oxide film according to the above (16), wherein a film made of an oxide different in the composition from the first and second oxides, is formed between the discontinuous small ridges made of the first oxide and the continuous layer made of the second oxide, by an atmospheric pressure CVD method.

(18) A photoelectric conversion element having a rear face electrode, via a photoelectric conversion layer, on the substrate with the transparent conductive oxide film as defined in any one of the above (1) to (13).

(19) The photoelectric conversion element according to the above (18), wherein the photoelectric conversion layer is a layer having p-, i- and n-type-layers formed in this order.

(20) The photoelectric conversion element according to the above (18), wherein the rear face electrode is a metal film containing Ag in an amount of at least 95 mol% in the film.

(21) The photoelectric conversion element according to the above (20), wherein the metal film contains Pd or Au in an amount of from 0.3 to 5 mol% in the film.

(22) The photoelectric conversion element according to any one of the above (18) to (21), which has a contact-

improving layer between the rear face electrode and the n-type-layer nearest to the rear face electrode, between the photoelectric conversion layer and the rear face electrode.

5 (23) The photoelectric conversion element according to the above (22), wherein the contact-improving layer has a resistivity of not more than $1 \times 10^{-2} \Omega \cdot \text{cm}$.

(24) The photoelectric conversion element according to the above (22) or (23), wherein the contact-improving
10 layer has an absorption coefficient of not more than $5 \times 10^3 \text{ cm}^{-1}$ in a wavelength region of from 500 to 800 nm.

(25) The photoelectric conversion element according to any one of the above (22) to (24), wherein the contact-improving layer contains zinc oxide (ZnO) as the main
15 component, and at least 90 atomic % of the total metal component in the layer is Zn.

(26) The photoelectric conversion element according to the above (25), wherein the layer containing ZnO as the main component, contains Ga or Al in an amount of from
20 0.3 to 10 mol% based on the summation with Zn.

The above contact-improving layer is preferably formed by a sputtering method which is carried out in an inert gas containing carbon dioxide in an amount of from 0.3 to 20 vol%.

25 Film-forming by such a sputtering method is preferably carried out by having the target inclined at an angle of from 30 to 90° to the substrate.

[Mode of Carrying out the Invention]

Now, the present invention will be described in detail.

The shape and construction of the substrate with a transparent conductive oxide film of the present invention will be described with reference to Figs. 1 and 2. However, the substrate with a transparent conductive oxide film of the present invention, the process for its production and the photoelectric conversion device (hereinafter a specific example of a solar cell will be described) are not limited thereto.

As shown in Fig. 1, the substrate with a transparent conductive oxide film of the present invention has, on a glass substrate 1, macro-sized roughness (texture) formed by a plurality of discontinuous ridges 2 and a plurality of flat portions 3 filling gaps between such ridges, and has a structure wherein the outer surfaces of the ridges 2 and the flat portions 3 have many microroughness (texture). Hereinafter, the structure having two roughnesses as described above, will be referred to as a double texture structure.

The height H_a of the ridge (the height from the top of the micron-size protrusions on the flat portions) is preferably from 0.2 to 2.0 μm , more preferably from 0.3 to 1.0 μm , further preferably from 0.4 to 0.7 μm . The spacing W_a between the ridges (the distance of the flat portion between the adjacent ridges) is linearly

preferably from 0 to 2.0 μm , more preferably at most 1.2 μm , further preferably at most 0.4 μm , particularly preferably at least 0.1 μm (every ridge is discontinuous).

In the present invention, the plurality of ridges may
5 have a discontinuous portion and a continuous portion, and the spacing W_a between ridges being from 0 to 2.0 μm , means that there may be a portion where no flat portion is present.

Further, the basal plane diameter D_a of the above
10 ridge is preferably from 1.0 to 3.0 μm , more preferably from 1.0 to 2.0 μm .

Further, the pitch P_a between the above ridges (the distance between the tops of the adjacent ridges) is linearly preferably from 0.1 to 2.0 μm , more preferably
15 from 0.5 to 1.5 μm , further preferably from 0.7 to 1.2 μm .

An enlarged view of Fig. 1 showing the above-mentioned microroughness, is shown in Fig. 2. As shown in Fig. 2, the height H_b of a protrusion 10 is preferably from 0.05 to 0.2 μm , more preferably from 0.1 to 0.2 μm .
20 Further, the pitch P_b between the protrusions (the distance between the tops of the adjacent protrusions) is linearly preferably from 0.1 to 0.3 μm , more preferably from 0.1 to 0.2 μm .

Further, the basal plane diameter D_b of the above
25 protrusion 10 is preferably from 0.1 to 0.3 μm , more preferably from 0.15 to 0.3 μm , and the ratio of height H_b /basal plane diameter D_b of the protrusion 10 is

preferably from 0.7 to 1.2, more preferably from 0.7 to 1.0.

By making the outer surfaces of the ridges 2 and the flat portions 3 to have roughness (microroughness) smaller than the roughness (macro-sized roughness) of such ridges, it is possible to intensely scatter light with a short wavelength, whereby it becomes possible to effectively scatter light in a wide wavelength range as a whole. Namely, it is possible to scatter light with a long wavelength by ridges having large roughness and to scatter light with a short wavelength by the surface with small roughness.

Further, by virtue of the above-mentioned double texture structure, the substrate with a transparent conductive oxide film of the present invention has the following relation between the wavelength and the haze over the entire substrate. Namely, over a full wavelength region of from 400 to 800 nm, the haze is from 10 to 95%. The haze is preferably from 40 to 70% or more in a wavelength region of from 400 to 600 nm, particularly preferably from 20 to 40% in a wavelength region of from 600 to 800 nm. Further, the difference between the maximum value and the minimum value of the haze (the maximum value - the minimum value) is preferably not more than 50%.

A substrate to be used as the substrate with a transparent conductive oxide film of the present

invention is not necessarily required to be flat and a plate-shaped, and it may have a curved surface or an abnormal profile. Such a substrate may, for example, be a glass substrate, a ceramic substrate, a plastic substrate or a metal substrate. The substrate is preferably a transparent substrate excellent in optical transmittance, and it is preferably a glass substrate from the viewpoint of the strength and heat resistance. As such a glass substrate, a transparent glass plate made of colorless transparent soda lime silicate glass, aluminosilicate glass, borate glass, lithium aluminosilicate glass, quartz glass, borosilicate glass substrate, no-alkali glass substrate or various other glass, may be employed.

When it is used as a substrate for a solar cell, the glass substrate preferably has a thickness of from 0.2 to 6.0 mm. Within this range, the glass substrate has high strength and high optical transmittance. Further, the substrate preferably has a high optical transmittance, for example, an optical transmittance of at least 80%, in a wavelength region of from 350 to 800 nm. Further, it preferably has a sufficient insulating property and high chemical and physical durability.

Further, in the case of a glass substrate made of glass containing sodium such as soda lime silicate glass, or a glass substrate made of a low alkali-containing glass, in order to minimize diffusion of an alkali

component from the glass to a transparent conductive film formed thereon, an alkali barrier layer such as a silicon oxide film, an aluminum oxide film or a zirconium oxide film, may be formed on the glass substrate surface.

5 Further, on the surface of the glass substrate, a layer to reduce the difference in the refractive index between the surface of the glass substrate and the layer formed thereon, may further be formed.

The alkali barrier layer to be formed on a soda lime
10 glass substrate may, for example, be SiO_2 , or a mixed oxide film or a multilayer film of SiO_2 and SnO_2 , and the film thickness is preferably from 20 to 100 nm. If the film thickness is within this range, it is possible to control absorption and reflection of a transmitted light
15 from the glass substrate. As an example of the multilayer film, a film may be mentioned wherein a SnO_2 film and a SiO_2 film are sequentially deposited on a soda lime glass substrate, and the film thicknesses are preferably from 20 to 30 nm and from 20 to 40 nm,
20 respectively. Especially, the thickness of the alkali barrier layer is preferably from 40 to 60 nm.

With respect to measurement of the surface condition, the microroughness formed on the outer surface can be measured by the following methods.

25 (1) Analysis of the surface profile

Protrusions on the film surface were observed by a scanning electron microscope (SEM), and from the obtained

microscopic photograph, the basal plane diameters of the protrusions were measured. Further, the surface morphology of the film was observed by SEM and by an atomic force microscope (AFM), and from the obtained
5 microscopic photograph, the surface morphology of the film and the heights of the protrusions were analyzed.

(2) Measurement of the surface coverage

The coverage on the substrate by small ridges made of the first oxide was measured from the SEM photograph.
10 A value obtained by dividing the area occupied by small ridges on the substrate by the area of the entire covered surface of the substrate was evaluated as the surface coverage.

The substrate with a transparent conductive oxide
15 film of the present invention may be such that a transparent conductive oxide film having the above-mentioned double texture structure may be formed on a transparent substrate, and the above structure may be formed by a single oxide, but preferably it is
20 constituted by the first and second oxides which will be described hereinafter.

The shape of the substrate with a transparent conductive oxide film of the present invention comprises the above ridges 2 and the flat portions 3, as shown in
25 Fig. 1, and its construction is preferably such that the ridges 2 and the flat portions 3 are formed by discontinuous small ridges 4 made of the first oxide

formed on a glass substrate 1 and a continuous layer 5 made of a second oxide 2, formed thereon.

Now, a preferred embodiment employing an atmospheric pressure CVD method, of the process for producing the
5 substrate with a transparent conductive oxide film of the present invention, will be described, but the process of the present invention is not limited thereto.

A soda lime glass substrate is heated to 500°C in a belt conveyor furnace, and on this glass substrate, 4
10 L/min of nitrogen gas containing 5 mol% of silane gas and 20 L/min of oxygen gas are simultaneously blown to form a silica film. Then, this glass substrate with a silica film is heated to 540°C, and tin tetrachloride, water and hydrogen chloride gas are simultaneously blown to form
15 discontinuous small ridges made of a first oxide on the silica film.

The surface coverage of the discontinuous small ridges made of the first oxide on the glass substrate is from 10 to 70%, and if the surface coverage is within
20 this range, the haze will be from 10 to 95% over a full wavelength region of from 400 to 800 nm, such being preferred. Further, such surface coverage is preferably from 50 to 60%, and if the surface coverage is within this range, after formation of the second oxide, the haze
25 will be from 40 to 70% (as an average of from 400 to 600 nm) or from 20 to 40% (as an average of from 600 to 800 nm), and the difference of the absolute values between

the maximum value and the minimum value of the haze (the maximum value - the minimum value) will be not more than 50%, such being preferred. The surface coverage can be adjusted by controlling the above-mentioned hydrogen chloride gas and the above-mentioned amount of water. As will be apparent from Examples given hereinafter, it is preferred to increase the proportion of hydrogen chloride gas to be added during formation of discontinuous small ridges made of the first oxide by the atmospheric pressure CVD method. The proportion of hydrogen chloride to be added is represented by the molar ratio of hydrogen chloride to tin tetrachloride (hereinafter referred to as HCl/SnCl_4), and HCl/SnCl_4 is preferably from 1.0 to 4.0. If HCl/SnCl_4 is within this range, small ridges can easily be formed, and the above-mentioned surface coverage can be controlled. It is particularly preferred that HCl/SnCl_4 is from 2.0 to 3.0.

The above first oxide will be described.

The above first oxide may be any oxide so long as it is highly transparent in a visible light region, and it may, for example, be SnO_2 , In_2O_3 , ZnO , CdO , CdIn_2O_4 , CdSnO_3 , MgIn_2O_4 , CdGa_2O_4 , GaInO_3 , InGaZnO_4 , $\text{Cd}_2\text{Sb}_2\text{O}_7$, Cd_2GeO_4 , CuAlO_2 , CuGaO_2 , SrCu_2O_2 , TiO_2 or Al_2O_3 . Among them, it is preferred to employ at least one oxide selected from the group consisting of SnO_2 , ZnO and In_2O_3 .

By forming such highly transparent small ridges on the above-mentioned transparent substrate and changing

their heights, a desired roughness structure can be prepared on the transparent substrate.

The refractive index is preferably from 1.8 to 2.2, more preferably from 1.9 to 2.1 at a wavelength of from
5 400 to 800 nm.

Further, the small ridges made of the above first oxide are discontinuous protrusions and not a continuous film. Therefore, at the transparent substrate portions not covered by such protrusions, the absorption loss of
10 incident light by small ridges is, of course, 0, and thus, the amount of incident light to the photoelectric conversion layer can be increased.

These small ridges are portions to increase the haze which will be described hereinafter (to increase the
15 scattering degree of light) and preferably have no electrical conductivity in order to accomplish high transparency by suppressing absorption by free electrons. Accordingly, in a case where SnO_2 is used as the first oxide, it is preferred that the small ridges are made
20 solely of SnO_2 , or in a case where they contain fluorine, the fluorine content is preferably not more than 0.01 mol%, more preferably not more than 0.005 mol%, based on SnO_2 .

Then, a continuous layer of a transparent conductive
25 oxide being the second oxide is formed on the discontinuous small ridges made of the first oxide and on the flat glass substrate not covered by the small ridges,

by means of an atmospheric pressure CVD method, an electron beam vapor deposition method, a vacuum vapor deposition method, a sputtering method or a spray method. To obtain a low resistance transparent conductive
5 substrate, it is advisable to uniformly form a continuous layer (hereinafter referred to also as the second oxide layer) made of a transparent conductive oxide being the second oxide on the small ridges and also on the flat glass substrate not covered by the small ridges.

10 Further, if a normal CVD method is employed, the microroughness to be formed on the outer surface, can be formed without requiring an etching step. Accordingly, the transparent conductive oxide film as the second oxide layer is preferably formed by such an atmospheric
15 pressure CVD method.

The second oxide layer will be described.

The second oxide is preferably a transparent conductive oxide which is transparent in a visible light region and which further has electrical conductivity, and
20 it may, for example, be SnO_2 , In_2O_3 or ZnO containing a dopant to provide electrical conductivity. Among them, SnO_2 preferably contains fluorine or antimony as a dopant in an amount of from 0.01 to 4 mol% based on SnO_2 . ZnO preferably contains at least one member selected from the
25 group consisting of B, Al and Ga, as a dopant, in an amount of from 0.02 to 5 mol% based on ZnO . In_2O_3 preferably contains Sn in an amount of from 0.02 to 4

mol% based on In_2O_3 .

The refractive index is preferably from 1.8 to 2.2, more preferably from 1.9 to 2.1, at a wavelength of from 400 to 800 nm.

5 In a case where SnO_2 is used as the above second oxide in order to improve the electrical conductivity of the second oxide, it is preferred to have a halogen atom doped by a hydrogen halide. The hydrogen halide may, for example, be HF, HCl, HBr or HI, but fluorine-doped SnO_2
10 is preferred. Specifically, it is for example preferred to have fluorine incorporated in an amount of from 0.01 to 4 mol%, more preferably from 0.1 to 1 mol%, to SnO_2 .

Further, the conductive electron density will be improved by using fluorine-doped SnO_2 as the above second
15 oxide. As the substrate to be used for a solar cell, the conductive electron density may be preferably within a range of from 5×10^{19} to $4 \times 10^{20} \text{ cm}^{-3}$, more preferably within a range of from 1×10^{20} to $2 \times 10^{20} \text{ cm}^{-3}$. Within this range, the amount of light absorption of the film is
20 small, and the film is highly transparent and has high durability against active hydrogen species, whereby the transparency will not be lost by hydrogen plasma irradiation commonly employed at the time of forming a thin film silicon-type solar cell which will be described
25 hereinafter.

Here, the height H_c of the small ridge made of the first oxide is preferably from 0.2 to 2.0 μm , more

preferably from 0.2 to 1.0 μm , further preferably from 0.4 to 0.7 μm . The distance W_c between the small ridges is linearly preferably from 0.1 to 2.0 μm , more preferably from 0.1 to 1.5 μm .

5 Further, the basal plane diameter D_c of the small ridge is preferably from 0.2 to 2.0 μm , more preferably from 0.2 to 1.0 μm , and the pitch P_c between the small ridges (the distance of the tops between the adjacent small ridges) is of the same value as P_a and is linearly
10 preferably from 0.1 to 2.0 μm , more preferably from 0.5 to 1.5 μm , further preferably from 0.7 to 1.2 μm .

The continuous layer 5 made of the second oxide is continuously formed on the above small ridges 4 and on the glass substrate 1 where no small ridges 4 are formed.

15 Further, as shown in Fig. 2, the surface of the continuous layer 5 has many micron-size protrusions 10 as mentioned above, and the thickness H_d of the continuous layer 5 on the small ridges 4 (including the micron-size protrusions) is preferably from 0.5 to 1.0 μm , more
20 preferably from 0.5 to 0.7 μm . Likewise, the thickness H_e of the continuous layer 5 on the glass substrate 1 (including the micron-size protrusions) is preferably from 0.5 to 1.0 μm , more preferably from 0.5 to 0.7 μm .

The same oxide may be used for the first oxide and
25 the second oxide, and it is preferred to use SnO_2 for each of them.

The method for producing small ridges made of the

first oxide on the substrate is not particularly limited. For example, using a metal chloride as the starting material and heating the substrate, the oxide is formed by an atmospheric pressure CVD method, wherein a mixture of the metal chloride, a hydrogen halide and water, is used, whereby the metal element concentration in these media is adjusted. Specifically, the amounts of the hydrogen halide and water are adjusted to the metal chloride.

10 In order to form the second oxide layer on the small ridges of the first oxide as a continuous layer to obtain a transparent conductive oxide film having ridges and flat portions of the present invention, a thin oxide layer made of an oxide having a composition different from the first and second oxides, may be formed between the first and second oxides, whereby the production can be made easily and certainly.

Therefore, it is preferred that after forming a thin oxide layer (hereinafter referred to also as a different oxide layer) made of an oxide having a composition different from the first and second oxides on the surface of a flat glass substrate containing discontinuous small ridges made of the first oxide, the second oxide layer is deposited. By forming such a layer on the first oxide, many micron-size protrusions will be readily formed on the surface of the second oxide layer, whereby the structure having ridges and flat portions of the present

invention can easily be formed.

In such a multilayer structure, it is necessary to reduce the reflection at the interfaces between the respective layers to maximize the amount of incident light to the photoelectric conversion layer of a solar cell which will be described hereinafter. Namely, it is desired to reduce reflection of light at the respective interfaces among the glass substrate, the first oxide, the different oxide layer and the second oxide layer as far as possible. For this purpose, it is desired that the refractive indices of the first oxide, the second oxide layer and the different oxide layer are close to one another as far as possible, and the film made of the different oxide layer is desired to be as thin as possible. Specifically, an oxide of at least one element selected from the group consisting of Si, Sn, Al, Zr and Ti may be mentioned, and among them, a layer containing an oxide of Si as the main component, is preferred.

Further, the different oxide layer is required to have high optical transmittance, and accordingly amorphous SiO_2 is more preferred. The film thickness is preferably from 2 to 40 nm, more preferably from 10 to 30 nm.

A method for forming the different oxide layer and the second oxide layer will be shown below. As the different oxide layer, a layer made of SiO_2 may, for example, be used. Using an atmospheric pressure CVD

method, the layer made of SiO_2 is formed on the discontinuous small ridges made of the first oxide and on the flat glass substrate where no small ridges are formed.

Specifically, a glass substrate having small ridges
5 made of the first oxide formed thereon, is heated to 520°C , and on this glass substrate, 4 L/min of nitrogen gas containing 5 mol% of silane gas and 3 L/min of oxygen gas are simultaneously blown to form a layer made of amorphous SiO_2 by an atmospheric pressure CVD method.
10 Further, this glass substrate is heated to 540°C , and tin tetrachloride, water, hydrogen fluoride and methanol are simultaneously blown thereto, and an atmospheric pressure CVD method is employed to form a fluorine (F)-doped SnO_2 transparent conductive oxide film as the second oxide
15 layer.

Further, the transparent conductive oxide as the second oxide may, for example, be F-doped SnO_2 , antimony-doped SnO_2 , Sn-doped In_2O_3 (ITO), aluminum-doped ZnO or gallium-doped ZnO .

20 In the substrate with a transparent conductive oxide film of the present invention, the first oxide is preferably one formed to improve the haze, and the second oxide is preferably an oxide having electrical conductivity and high transparency. Further, the
25 refractive indices of the first oxide and the second oxide layer are preferably of an equal level and specifically at a level of from 1.8 to 2.2. If both the

refractive indices of the first oxide and the second oxide are in this range, reflection of light at the interface between the first oxide and the second oxide will be controlled, whereby the optical transmittance
5 will not decrease, such being desirable.

The first oxide is preferably one to improve the haze. Whereas, the second oxide layer formed as a continuous layer is preferably an oxide having electrical conductivity and high transparency.

10 The substrate with a transparent conductive oxide film of the present invention is constituted by a plurality of ridges having the above-described shape and a plurality of flat portions filling spacing between the ridges, and the surfaces of the ridges and the flat
15 portions have many continuous micron-size protrusions. The height from the substrate surface to the top of the ridge (including the micron-size protrusions) is preferably from 0.8 to 3.0 μm , more preferably from 0.8 to 1.0 μm , and the sheet resistance of the entire
20 conductive film is preferably from 8 to 20 Ω/\square , more preferably from 8 to 12 Ω/\square . The optical transmittance (transparency) at 550 nm is preferably from 80 to 90%, more preferably from 85 to 90%, as measured by an
immersion liquid method which will be described in detail
25 in Examples given hereinafter. Further, as mentioned above, the haze is preferably from 10 to 95% over a full wavelength region of from 400 to 800 nm.

If the above-described construction is employed for a transparent electrode (the transparent conductive oxide film in the present invention) of a photoelectric conversion element such as a solar cell which will be described hereinafter, light entered through the substrate is refracted and scattered by the transparent electrode and then enters a photoelectric conversion section and passes over a long distance in the photoelectric conversion section. As a result, a large quantity of light will be absorbed at the photoelectric conversion section, whereby the photoelectric conversion efficiency will be improved.

Now, a preferred embodiment showing the construction of a photoelectric conversion element of the present invention (hereinafter described as a solar cell) comprising the above-described substrate with a transparent conductive oxide film, a photoelectric conversion layer and a rear face electrode, will be described with reference to Fig. 4. However, the substrate with a transparent conductive oxide film of the present invention, the solar cell and the processes for their production are not limited thereto.

As shown in Fig. 4, the solar cell of the present invention is shown at 20 and has, on a glass substrate 21, a transparent conductive oxide film 22 to be used for the substrate with a transparent conductive oxide film of the present invention, a photoelectric conversion layer 26

and a back electrode layer 27. This construction is one of photoelectric conversion apparatus which can be produced at a relatively low cost. Such a solar cell 20 is designed so that light 28 enters from the glass substrate 21 side and is mainly absorbed within the i-type-layer 24. An electromotive force is generated between two electrodes i.e. the transparent conductive oxide film 22 and the rear face electrode 27, and the electricity will be taken out from the solar cell via a
5
10 conductive wire 29.

Now, the respective constructions will be described.

The photoelectric conversion layer 26 may be any layer so long as it is a photoelectric conversion layer which can be used for a common solar cell. The structure
15 of the photoelectric conversion layer 26 shown in Fig. 4 is a single junction comprising three layers wherein a p-type-layer 23, an i-type-layer 24 and an n-type-layer 25 are formed in this order. The material for the p-type-layer may, for example, be hydrogenated amorphous silicon
20 carbide (a-SiC:H), and the material for the i-type-layer may, for example, be hydrogenated amorphous silicon (a-Si:H), crystalline silicon (c-Si), microcrystalline silicon (μ c-Si), or hydrogenated amorphous silicon germanium (a-SiGe:H). Further, the material for the n-
25 type-layer may, for example, be hydrogenated amorphous silicon (a-Si:H) or microcrystalline silicon (μ c:Si).

Among them, preferred is a single junction of three

layers wherein an a-SiC:H layer as the p-type-layer, an a-Si:H layer as the i-type-layer and an a-Si:H layer as the n-type-layer are formed in this order (hereinafter a p-i-n-type-layer of a-Si).

5 Further, as another example, an electric power generation layer of a tandem structure wherein on the p-i-n-type-layer of a-Si, a still another p-i-n-type-layer is formed, may, for example, be preferably used. More preferred is an electromotive layer of a tandem structure
10 wherein the layer formed on the p-i-n-type-layer of a-Si is three layers wherein an a-Si:H layer as the p-type-layer, a microcrystalline Si layer as the i-type-layer and an a-Si:H layer as the n-type-layer are formed in this order, or three layers wherein an a-Si:H layer as
15 the p-type-layer, an a-SiGe:H layer as the i-type-layer and an a-Si:H layer as the n-type-layer are formed in this order. By using the electromotive layer of a tandem structure for the photoelectric conversion layer, photoelectric conversion of light on not only the short
20 wavelength side but also on the long wavelength side will be possible. Accordingly, if the electromotive layer having such a tandem structure is employed on the substrate with a transparent conductive oxide film of the present invention having the double texture structure,
25 the effect for improving the photoelectric conversion efficiency will be more distinct.

Next, as the electrode material for the above back

electrode layer 27, a layer containing Ag or an Ag alloy, or Al or an Al alloy, as the main component, may be used. Preferably, a metal film containing crystalline Ag in an amount of at least 95 mol% in the film, is employed. By
5 using crystalline Ag for the metal film of the rear face electrode, it becomes possible that light passed through the photoelectric conversion layer 26 is reflected, and the reflected light can be returned again to the photoelectric conversion layer 26, thus leading to the
10 effect for improving the photoelectric conversion efficiency.

The above metal film may contain Pd and/or Au as a component. The content of Pd and Au in the film is preferably from 0.3 to 5 mol% each, more preferably from
15 0.3 to 3 mol% each, based on the sum with Ag.

Further, in a case of a layer composed solely of Ag, the total amount of impurities is preferably not more than 1 mol%.

The solar cell of the present invention may have a
20 contact-improving layer between the above back electrode layer 27 and the photoelectric conversion layer 26, as shown in Fig. 4. An embodiment of a substrate for a solar cell having the transparent conductive oxide film of the present invention and the contact-improving layer,
25 will be described with reference to Fig. 5. However, the substrate with a transparent conductive oxide film of the present invention, the process for its production and the

photoelectric conversion element, are not limited thereto.

As shown in Fig. 5, the substrate for a solar cell is shown at 40 and comprises a glass substrate 44, the transparent conductive oxide film 45 of the present invention, a photoelectric conversion layer 42 made of a p-i-n-type-layer of a-Si, a contact-improving layer 41 and a rear face electrode 43.

The contact-improving layer 41 is located between the above-mentioned p-i-n-type-layer of a-Si and the rear face electrode 43, as shown in Fig. 5, and is used to improve the contact of the photoelectric conversion layer represented by the p-i-n-type-layer of a-Si with the rear face electrode represented by the rear face electrode 43.

Further, the contact-improving layer 41 is preferably such that the resistivity and the absorption coefficient are small. Specifically, the resistivity is preferably at most $1 \times 10^{-2} \Omega \cdot \text{cm}$, more preferably at most $5 \times 10^{-3} \Omega \cdot \text{cm}$. If the resistivity of the above contact-improving layer 41 is within this range, it becomes possible to pass the electromotive force photoelectrically converted in the p-i-n-type-layer 42 of a-Si as the photoelectric conversion layer to the rear face electrode 43 as the rear face electrode without reducing it.

The absorption coefficient is not more than $5 \times 10^3 \text{ cm}^{-1}$, more preferably not more than $2 \times 10^3 \text{ cm}^{-1}$ in a wavelength region of from 500 to 800 nm. If the

absorption coefficient of the above contact-improving layer 41 is within this range, it becomes possible to pass the light passed through the p-i-n-type-layer 42 of a-Si as the photoelectric conversion layer to the rear face electrode 43 as the rear side electrode without absorption.

The material for the contact-improving layer 41 preferably contains zinc oxide (ZnO) as the main component, whereby at least 90 atomic% of the total metal component in the film is preferably Zn. More preferred is a layer having gallium (Ga) incorporated to the above layer containing zinc oxide as the main component, or a layer having aluminum (Al) incorporated thereto. By incorporating Ga or Al, the conductive electron density will be increased, and it serves as a dopant to zinc oxide, whereby it has an effect to improve the electroconductivity of the entire contact-improving layer 41.

Further, the content of Ga or Al is preferably from 0.3 to 10 mol%, more preferably from 0.3 to 5 mol%, based on the sum with Zn. If the content is within this range, it is possible to prevent an increase of the absorption coefficient of the contact-improving layer 41 due to an excessive improvement of the electroconductivity.

Further, the zinc oxide layer containing Ga or Al may contain impurities, and the total amount of impurities is preferably not more than 1 mol%.

The present invention provides a process for forming the above-mentioned solar cell by means of a plasma-enhanced CVD method or a sputtering method.

Specifically, a method for forming a photoelectric
5 conversion layer on the substrate with a transparent
conductive oxide film of the present invention, is the
plasma-enhanced CVD method. Further, a method of forming
the above-mentioned contact-improving layer and the
above-mentioned rear face electrode on the above
10 photoelectric conversion layer in this order, is the
sputtering method.

The plasma-enhanced CVD method may be carried out
under the conditions for forming a photoelectric
conversion layer in a common solar cell, and for example,
15 the p-i-n-type-layer of a-Si may be formed under the
condition shown in Examples given hereinafter.

The sputtering method is a method for forming the
above-mentioned contact-improving layer on the above
photoelectric conversion layer. Specifically, it is a
20 method for depositing a contact-improving layer on the
photoelectric conversion layer by carrying out sputtering
in an inert gas atmosphere using Ga-doped zinc oxide
(hereinafter GZO) as a target.

Further, the method for forming the GZO layer is not
25 particularly limited, and a physical vapor deposition
method such as a sputtering method or a vacuum vapor
deposition method, or a chemical vapor deposition method

such as a CVD method may be employed. However, it is preferred to employ a physical vapor deposition method, whereby good conductive film characteristics can be obtained at a lower substrate temperature. In the following Examples, a DC sputtering method is employed, but this may be carried out by a high frequency sputtering method.

Likewise, a method for depositing a back electrode layer on the GZO layer as the contact-improving layer by carrying out sputtering in an inert gas atmosphere employing a metal containing at least 95 mol% of Ag (hereinafter referred to as a Ag type metal) as a target, is also a sputtering method.

The solar cell of the present invention may be prepared, for example, as follows. Firstly, a GZO target to form the contact-improving layer is attached to a cathode of a DC magnetron sputtering equipment. Further, the substrate with a transparent conductive oxide film having a photoelectric conversion layer formed, is attached to the substrate holder. Then, the interior of the film-forming chamber is evacuated to vacuum, and then, argon gas is introduced as sputtering gas. As the sputtering gas, other than the argon gas, an inert gas such as He, Ne or Kr may be employed. However, it is preferred to use argon gas which is inexpensive and whereby the discharge is stable. Further, it is more preferably an inert gas containing carbon dioxide in an

amount of from 0.3 to 20 vol%, still more preferably from 0.3 to 10 vol%. By incorporating carbon dioxide, it is possible to prevent an increase of the absorption coefficient due to an excessive improvement of the electrical conductivity by Ga doping.

The pressure during the sputtering is usually from 0.1 to 1.5 Pa. Further, the residual gas pressure is preferably from 1.0×10^{-5} to 2.5×10^{-3} Pa. The substrate temperature is usually from room temperature to 200°C, particularly from 100 to 150°C, from the viewpoint of the characteristics of the solar cell.

Further, for the above film forming by sputtering, it is preferred to carry out sputtering by having the GZO target inclined at an angle of from 30 to 90° to the substrate (hereinafter referred to as inclined sputtering), whereby low resistance and low absorption can be accomplished simultaneously.

For the formation of the back electrode layer, in the same manner as for the contact-improving layer, firstly, a Ag type metal target to form the back electrode layer, is attached to a cathode of the DC magnetron sputtering equipment. Further, as mentioned above, substrate having the contact-improving layer formed thereon, is attached to the substrate holder. Then, the interior of the film-forming chamber is evacuated to vacuum, and then, argon gas is introduced as sputtering gas. As the sputtering gas, other than the

argon gas, an inert gas such as He, Ne or Kr may be employed. However, it is preferred to use argon gas which is inexpensive and whereby discharge will be stable.

The pressure during the sputtering is also similar
5 and is usually from 0.1 to 1.5 Pa. Further, the residual gas pressure is preferably from 1.0×10^{-5} to 2.5×10^{-3} Pa. The temperature of the substrate during the sputtering is usually from room temperature to 200°C, particularly from 100°C to 150°C, from the viewpoint of the adhesion
10 between the substrate and the film. It is preferred to heat the substrate during the sputtering, whereby improvement of crystallinity of Ag as the rear face electrode, improvement in the reflectance and reduction of the resistance of the entire substrate can be obtained.

15 Further, when a Ag layer containing Pd and/or Au is formed as the back electrode layer, separate targets may be used for Pd and/or Au, or an Ag alloy containing Pd and/or Au having a desired composition, may be preliminarily prepared, and such an alloy may be used as
20 the target.

The respective film thicknesses of the photoelectric conversion layer, the contact-improving layer and the back electrode layer, formed by the above plasma-enhanced CVD method and the above sputtering method, will be shown
25 below.

As mentioned above, when the photoelectric conversion layer is a tandem structure having a separate

p-i-n-type-layer formed on the p-i-n-type-layer of a-Si, it may have a tandem structure wherein the layer to be formed on the p-i-n-type-layer of a-Si is three layers wherein an a-Si:H layer as the p-type-layer, a
5 microcrystalline Si layer as the i-type-layer and an a-Si:H layer as the n-type-layer, are formed in this order or three layers wherein an a-Si:H layer as the p-type-layer, an a-SiGe:H layer as the i-type-layer and an a-Si:H layer as the n-type-layer, are formed in this order.
10 Accordingly, the film thickness of the photoelectric conversion layer varies depending upon the type of the electromotive layer to be formed. The thickness of the p-type-layer or the n-type-layer formed by the plasma-enhanced CVD method is within a range of from 5 to 15 nm,
15 and the thickness of the i-type-layer is from 100 to 400 nm. Further, the thickness of the microcrystalline Si layer in the tandem structure is from 500 to 3000 nm.

The thickness of the contact-improving layer formed by the sputtering method is preferably from 50 to 200 nm,
20 more preferably from 50 to 150 nm. When the contact-improving layer is a GZO layer, the film thickness is preferably from 50 to 150 nm. If the thickness of the contact-improving layer is within this range, an adequate effect for improving the contact can be obtained also for
25 the double texture structure like the substrate with a transparent conductive oxide film of the present invention.

Further, the thickness of the back electrode layer is preferably from 100 to 300 nm, more preferably from 150 to 250 nm. Especially when the back electrode layer is Ag, the thickness is preferably from 150 to 250 nm.

5 **[Examples]**

A substrate with a transparent conductive oxide film of the present invention having a double texture structure was prepared under the conditions as identified in the following Examples.

10 (1) PRODUCTION EXAMPLE 1

Formation of first oxide

a) EXAMPLE

A substrate with a transparent conductive oxide film was prepared by an atmospheric pressure CVD method on a
15 soda lime glass substrate. A soda lime glass substrate of 300 mm × 300 mm × 1.1 mm in thickness was heated to 500°C in a belt conveyor furnace (speed of the belt: 1 m/min), and firstly, 4 L/min of nitrogen gas containing 5 mol% of silane gas and 20 L/min of oxygen gas were blown
20 thereto simultaneously to form a silica film. Then, the glass substrate with this silica film was heated to 540°C, and tin tetrachloride, water and hydrogen chloride gas were simultaneously blown thereto to form SnO₂ as the first oxide. Tin tetrachloride was preliminarily heated
25 to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 2 L/min. Further, water heated to 100°C was blown at a rate of 15 g/min, and hydrogen

chloride gas was blown at a rate of 0.5 L/min to the substrate.

After the film formation, the surface morphology of the film was observed by SEM, whereby SnO_2 as the first
5 oxide was found to be not a continuous film but form small ridges being macro-sized roughness. A SEM image of the substrate as observed from directly above, was image-processed and calculated, whereby the coverage of the glass substrate surface by SnO_2 forming the small ridges,
10 was 60%, the heights H_c of the small ridges made of SnO_2 were from 0.4 to 0.6 μm , the basal plane diameters D_c of the small ridges made of SnO_2 were from 0.5 to 0.7 μm , the distances W_c between the adjacent small ridges were from 0.2 to 0.5 μm , and the pitches P_c between the
15 adjacent small ridges were from 0.7 to 1.2 μm . Further, by the measuring methods which will be described hereinafter, the sheet resistance of the small ridges made of the first oxide was found to be at least $20 \text{ M}\Omega/\square$, the haze was found to be 55% (as an average of from
20 400 to 600 nm), or 70% (as an average of from 600 to 800 nm), and the optical transmittance at 550 nm measured by an immersion liquid method was 88%.

b) REFERENCE EXAMPLE

In the same manner as in the above Example, a soda
25 lime glass substrate of 300 mm \times 300 mm \times 1.1 mm in thickness, was heated to 500°C in a belt conveyor furnace (speed of the belt: 1 m/min), and firstly, 4 L/min of

nitrogen gas containing 5 mol% of silane gas and 20 L/min of oxygen gas were simultaneously blown thereto to form a silica film. Then, the glass substrate with this silica film, was heated to 540°C, and tin tetrachloride, water and hydrogen chloride gas were blown thereto in the proportions as identified below, to form SnO₂ as the first oxide. Here, tin tetrachloride was preliminarily heated to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 2 L/min. Whereas, water heated to 100°C was blown at a rate of 15 g/min and hydrogen chloride gas was blown at a rate of from 0 to 0.6 L/min to the substrate. Figs. 3a to 3d are electron microscopic photographs.

Firstly, in the case where hydrogen chloride was not added, the shape of small ridges became the shape as shown in Fig. 3d (the height of the small ridges: 300 nm), the surface coverage was 96%, and the haze of the entire transparent electrode finally obtainable was about 20% (as an average of from 400 to 800 nm). Whereas, in the case where the molar ratio of hydrogen chloride to tin tetrachloride (HCl/SnCl₄) was 1.1, the shape of the small ridges became the shape shown in Fig. 3c (the height of the small ridges: 390 nm), the surface coverage was 80%, and the haze of the entire transparent electrode finally obtainable was about 30% (as an average of from 400 to 800 nm). Likewise, in the case where HCl/SnCl₄ was 2.2, the shape of the small ridges became the shape as shown

in Fig. 3b (height of the small ridges: 570 nm), the surface coverage was 53%, and the haze of the entire transparent electrode finally obtainable was about 60% (as an average of from 400 to 800 nm). In a case where
5 HCl/SnCl₄ was 3.3, the shape of the small ridges became the shape as shown in Fig. 3a (height of the small ridges: 730 nm), the surface coverage was 47%, and the haze of the entire transparent electrode finally obtainable was about 70% (as an average of from 400 to
10 800 nm).

Formation of second oxide layer

a) EXAMPLE

Then, on the small ridges made of SnO₂ obtained in the previous Example, an amorphous SiO₂ film as a
15 different oxide layer was formed by means of an atmospheric pressure CVD method. The glass temperature was 520°C, the amount of the nitrogen gas containing 5 mol% of silane gas was 0.6 L/min, and the amount of the oxygen gas was 3L/min. Further, this substrate was
20 heated to 540°C, and tin tetrachloride, water, HF gas and methanol were blown thereto to form a F-doped SnO₂ film as a second oxide layer. The tin tetrachloride was preliminarily heated to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 12 L/min.
25 Whereas, water heated to 100°C was blown at a rate of 90 g/min, and the HF gas was blown at a rate of 3 L/min to the substrate. Further, to the methanol preliminarily

heated to 30°C, nitrogen gas was blown at a rate of 0.1 L/min, and the mixture was blown to the substrate.

The surface morphology of the film was observed by SEM and AFM. According to the SEM observation, the F-doped SnO₂ film as the second oxide layer was found to be continuous layer, and the coverage of the glass substrate surface by the F-doped SnO₂ film was 100%. According to the SEM and AFM observation, the heights H_a of the ridges were from 0.4 to 0.6 μm , the distances W_a between the adjacent ridges were from 0 to 0.4 μm , the basal plane diameters D_a of the ridges were from 1.0 to 1.5 μm , the pitches P_a between the adjacent ridges were from 0.3 to 1.2 μm , and the heights from the substrate surface to the tops of the ridges (including micron-size protrusions) were from 0.8 to 1.0 μm . Further, the surface of the F-doped SnO₂ film had many micron-sized roughness, and the heights H_b of the protrusions were from 0.1 to 0.2 μm , the pitches P_b between the protrusions were from 0.1 to 0.2 μm , the basal plane diameters D_b of the protrusions were from 0.2 to 0.3 μm , and the height H_b /basal plane diameter D_b of the protrusions was 0.73. Further, from the measuring methods which will be described hereinafter, the sheet resistance was found to be 10 Ω/\square , the haze was found to be 65% (as an average of from 400 to 600 nm) or 30% (as an average of from 600 to 800 nm), and the optical transmittance at 550 nm measured by an immersion liquid method was 87%.

In order to quantitatively analyze the conductive electron density and the fluorine content in the F-doped SnO₂ film as the second oxide layer, tin tetrachloride, water, HF gas and methanol were blown onto a glass substrate having silica preliminarily coated, to form a F-doped SnO₂ film. With respect to the substrate temperature and the gas flow rates, the same manner as the conditions for preparing the second oxide layer in this Example were used. The obtained F-doped SnO₂ film was dissolved in hydrochloric acid containing zinc, followed by quantitative analysis by gas chromatography, whereby the fluorine content was 0.05 mol% based on SnO₂. Further, the electron density was obtained by measurement by the Hall effect (van der Pauw method) and found to be $1.5 \times 10^{20} \text{ cm}^{-3}$. Further, the thickness of the F-doped SnO₂ film was 0.6 μm as measured by a feeler film thickness meter.

(2) PRODUCTION EXAMPLE 2

For the formation of the first oxide, a silica film was prepared under the same manner as in Production Example 1, and then, the glass substrate with the silica film was heated to 540°C, and tin tetrachloride, water, and hydrogen chloride gas were simultaneously blown thereto to form SnO₂ as the first oxide. The tin tetrachloride was preliminarily heated to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 4 L/min. Whereas, water heated to 100°C was

blown at a rate of 30 g/min, and the hydrogen chloride gas was blown at a rate of 1.0 L/min to the substrate. Formation of the second oxide layer was carried out under the same manner as in Production Example 1.

5 The roughness of the surface of the obtained film was observed by SEM and AFM. According to the SEM observation, like the film obtained in Example of Production Example 1, the F-doped SnO_2 film as the second oxide layer was a continuous layer, and the coverage of
10 the glass substrate surface by the F-doped SnO_2 film was 100%. According to the SEM and AFM observation, the heights H_a of the ridges were from 0.8 to 1.2 μm , the distances W_a between the adjacent ridges were from 0 to 0.6 μm , the basal plane diameters D_a of the ridges were
15 from 1.2 to 1.8 μm , the pitches P_a between the adjacent ridges were from 0.6 to 2.0 μm , and the heights from the substrate surface to the tops of the ridges (including micron-size protrusions) were from 1.4 to 1.8 μm . Further, the surface of the F-doped SnO_2 film had many
20 micron-size irregularities, the heights H_b of the protrusions were from 0.1 to 0.2 μm , the pitches P_b between the protrusions were from 0.1 to 0.2 μm , the basal plane diameters D_b of the protrusions were from 0.2 to 0.3 μm , and the height H_b /basal plane diameter D_b of
25 the protrusions was 0.73. Further, by the measuring methods which will be described hereinafter, the sheet resistance was found to be 11 Ω/\square , and the haze was

found to be 82% (as an average of from 400 to 600 nm) or 62% (as an average of from 600 to 800 nm), and the optical transmittance at 550 nm measured by an immersion liquid method was 86%.

5 Electron microscopic photographs of the film obtained in Example of the above Production Example 1 and the film obtained in Production Example 2 are shown in Figs. 6 and 7, respectively. Figs. 6A and Figs. 6B are electron microscopic photographs showing the surface
10 morphology of the film shown by 20000 magnifications and 3500 magnifications, respectively. Likewise, Fig. 7A and Fig. 7B are electron microscopic photographs showing the surface morphology of the film shown by 20000 magnifications and 3500 magnifications, respectively.
15 From these photographs, it was found that the substrate with a transparent conductive oxide film of the present invention having a transparent conductive oxide film formed on a substrate has a double texture structure.

Now, the methods for measuring the sheet resistance, the haze and the optical transmittance of the obtained
20 substrate with a film, will be described. The sheet resistance was measured by a four terminal method. A square of about 3 cm x 3 cm was cut out from the substrate with a conductive oxide film, and a pair of
25 electrodes having a length of 3 cm were attached at the opposing two sides in parallel on the film so that the distance between the electrodes would be 3 cm. Then, the

resistance between the electrodes was measured by a tester and taken as the sheet resistance. The haze was measured by means of a spectro-photometer (U3400, manufactured by Hitachi, Ltd.). The measured wavelength range was from 400 to 800 nm, the measured distance was 10 nm. Firstly, by setting the incident light surface to be the glass surface, the optical transmittance was measured by a normal transmission method. The optical transmittance at each wavelength is designated as $T_d(\lambda)$. Then, an integrating sphere having an inner sphere diameter of 150 mm was mounted, and the film surface of the sample was closely contacted to the integrating sphere, and the integrating sphere optical transmittance was measured. The optical transmittance at each wavelength at that time is designated as $T_t(\lambda)$. From the foregoing measurement results, the haze $H_z(\lambda)$ was calculated by the following formula.

$$H_z(\lambda) = (T_t(\lambda) - T_d(\lambda)) \times 100 / T_t(\lambda) \quad (\%)$$

The spectral transmittance was measured by means of an immersion liquid method to minimize the measurement error due to the difference in the surface roughness of the conductive oxide substrate. The immersion liquid method is a method wherein a few drops of diiodomethane was dropped on the film surface of the substrate with the conductive oxide film, and the optical transmittance is measured by sandwiching the solution by a transparent quartz glass. The absorption by diiodomethane is mainly

at most 400 nm. Accordingly, within a range of from 400 to 800 nm, there will be no substantial absorption by the diiodomethane and the quartz glass. The measurement of the spectral transmittance was carried out by mounting an
5 integrating sphere having an inner sphere diameter of 150 mm (150-0901, manufactured by Hitachi, Ltd.) on a spectro-photometer (U3400, manufactured by Hitachi, Ltd.).

b) COMPARATIVE EXAMPLE

An example is shown wherein when the second oxide
10 layer was formed without forming a different oxide layer, the small ridges were enlarged, and a continuous layer was not formed. Fig. 8A and B are electron microscopic photographs when on the first oxide (Fig. 8A), the second oxide layer was formed (Fig. 8B).

15 Firstly, a soda lime glass substrate of 300 mm × 300 mm × 1.1 mm in thickness was heated to 500°C in a belt conveyor furnace (speed of the belt: 1 m/min), and firstly, 4 L/min of nitrogen gas containing 5 mol% of silane gas and 20 L/min of oxygen gas were simultaneously
20 blown thereto to form a silica film. For a SnO₂ film as the first oxide, this glass substrate with the silica film was heated to 540°C, and then tin tetrachloride, water and hydrogen chloride gas were simultaneously blown thereto to form SnO₂ as the first oxide. The tin
25 tetrachloride was preliminarily heated to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 2 L/min. Whereas, water heated to 100°C was

blown at a rate of 15 g/min, and the hydrogen chloride gas was blown at a rate of 0.5 L/min to the substrate.

Then, the F-doped SnO_2 film as the second oxide layer was formed by heating this substrate to 540°C , followed
5 by blowing tin tetrachloride, water, HF gas and methanol thereto. The tin tetrachloride was preliminarily heated to 45°C and transferred onto the substrate by blowing nitrogen gas at a rate of 12 L/min. Whereas, water heated to 100°C was blown at a rate of 90 g/min, and the
10 HF gas was blown at a rate of 3 L/min to the substrate. Further, 0.1 L/min of nitrogen gas was blown to methanol preliminarily heated to 30°C , and the mixture was blown to the substrate. However, in the case where a different oxide layer was not formed, even if it was attempted to
15 form the second oxide layer under the same manner as in the case where the different oxide layer was formed, the obtained shape was such that small ridges made of the first oxide were enlarged, as shown by the electron microscopic photographs of Table 8B.

20 Then, a solar cell of the present invention was produced under the following conditions.

Formation of photoelectric conversion layer

Then, the substrate with the transparent conductive oxide film obtained in Example of Production Example 1
25 was cut into a size of 40 mm \times 40 mm, and a photoelectric conversion layer having p-i-n junction was laminated on the transparent conductive oxide film by a

plasma-enhanced CVD equipment (SLCM14, manufactured by Shimadzu Corporation). The p-i-n junction is one wherein the p-type-layer, the i-type-layer and the n-type-layer are formed (joined) in this order. The film-forming
5 conditions for the p-type-layer, the i-type-layer, the n-type-layer and the p/i buffer layer used in this test were shown in Table 1, 2, 3 and 4, respectively.

Formation of contact-improving layer and back electrode layer

10 Then, on the photoelectric conversion layer, a GZO layer was formed in a thickness of about 100 nm by a DC sputtering method by inclining a GZO target containing 5 mol% of Ga based on the sum with zinc at an angle of 60° to the substrate. The sputtering was carried out by
15 preliminarily evacuating the vacuum apparatus to a reduced pressure of at most 10^{-4} Pa and then introducing 75 sccm of Ar gas and 1 sccm of CO₂ gas, whereby the pressure during the sputtering was adjusted to be 4×10^{-1} Pa, and the sputtering power was adjusted to be 2.4 W/cm².
20 Further, the Ga content in the GZO film was 5 mol% based on the sum with zinc in the same content as in the target, and the substrate temperature was adjusted to be 100°C. The performance of the GZO single film was such that the resistivity was $5 \times 10^{-3} \Omega \cdot \text{cm}$, and the absorption
25 coefficient was $1 \times 10^3 \text{ cm}^{-1}$ at from 500 to 800 nm. Finally, a Ag film as the back electrode layer was formed in a thickness of about 200 nm on the GZO film by a sputtering

method in an Ar gas atmosphere using a Ag target (the pressure during the sputtering: 4×10^{-1} Pa, sputtering power: 1.4 W/cm^2), and finally a solar cell having a size of $5 \text{ mm} \times 5 \text{ mm}$ was prepared.

- 5 To the solar cell thus obtained, light of AM (airmass) of 1.5 was irradiated by a solar simulator, whereby the photoelectric conversion efficiency was obtained from the results of measuring the short circuit current, the open circuit voltage and the fill factor.
- 10 The thicknesses of the respective layers of the solar cell were as shown in the following Table 5. For the measurement of the solar cell characteristics (IV characteristic, spectral response), CD-24 model solar simulator, manufactured by OPHTHO RESEARCH was employed.
- 15 The irradiated light spectrum of the solar simulator at the time of IV measurement was adjusted so that AM was 1.5, the light intensity was 100 mW/cm^2 . As a result, the short circuit current was 18.7 mA/cm^2 , the open circuit voltage was 0.81 V, the fill factor was 0.71, and
- 20 the conversion efficiency was 10.8%.

[Table 1]

Table 1 Deposition condition of p-type-layer

Substrate surface temperature	180°C
Pressure	40 Pa
RF power	0.03 W/cm ²
Gas flow rate SiH ₄	10 sccm
CH ₄	20 sccm
H ₂	20 sccm
H ₂ /B ₂ H ₆	100 sccm

(B₂H₆: 1000 ppm)

[Table 2]

5 Table 2 Deposition condition of i-type-layer

Substrate surface temperature	180°C
Pressure	27 Pa
RF power	0.03 W/cm ²
Gas flow rate SiH ₄	10 sccm

[Table 3]

Table 3 Deposition condition of n-type-layer

Substrate surface temperature	180°C
Pressure	40 Pa
RF power	0.03 W/cm ²
Gas flow rate SiH ₄	10 sccm
H ₂	100 sccm
H ₂ /PH ₃	100 sccm

(PH₃: 1000 ppm)

[Table 4]

Table 4 Deposition condition of p/i buffer layer

Substrate surface temperature	180°C
Pressure	27 Pa
RF power	0.03 W/cm ²
Gas flow rate SiH ₄	10 sccm
CH ₄	0 to 20 sccm
H ₂	20 sccm

[Table 5]

Table 5

Thickness of p-type-layer	10 nm
Thickness of p-SiC buffer layer	8 nm
Thickness of i-type-layer	350 nm
Thickness of n-type-layer	40 nm
Thickness of GZO layer	10 nm
Thickness of Ag layer	200 nm

[Effects of the Invention]

The substrate with a transparent conductive oxide film having a double texture structure, obtained by the present invention, has low resistance and high transparency and is excellent in mass productivity, and it has good light scattering performance over a full wavelength region of solar ray (from 300 nm to 3 μm). Further, according to the process of the present invention, such a substrate can be obtained with good productivity. If this substrate is used as a substrate for a thin film silicon type photoelectric conversion

element, it is possible to obtain a photoelectric conversion element (especially a solar cell) excellent in the photoelectric conversion efficiency.

[Brief Explanation of the Drawings]

5 **[Fig. 1]**

Fig. 1 is a partly omitted cross-sectional view showing the shape and construction of the substrate with a transparent conductive oxide film of the present invention.

10 **[Fig. 2]**

Fig. 2 is an enlarged view of a ridge shown in Fig. 1.

[Fig. 3]

Fig. 3 is electron microscopic photographs showing
15 the shapes of small ridges formed by using hydrogen chloride gas, and a, b, c and d represent production examples under different conditions, respectively.

[Fig. 4]

Fig. 4 is a partly omitted cross-sectional view
20 showing the construction of a solar cell.

[Fig. 5]

Fig. 5 is an enlarged view of the portion other than conductive wires, shown in Fig. 4.

[Fig. 6]

25 Fig. 6A and Fig. 6B are electron microscopic photographs showing the surface morphology of the film obtained in an Example of Production Example 1.

[Fig. 7]

Fig. 7A and Fig. 7B are electron microscopic photographs showing the surface morphology of the film obtained in Production Example 2.

5 **[Fig. 8]**

Fig. 8 is electron microscopic photographs showing small ridges, wherein A shows the first oxide layer, and B shows the second oxide layer formed thereon.

[Explanation of the Reference Numerals]


- | | | |
|----|---|--------------------------------------|
| 10 | 1: glass substrate | 2: ridge |
| | 3: flat portion | 4: small ridge |
| | 5: continuous layer | 10: protrusion |
| | W_a : distance between ridges | |
| | W_c : distance between small ridges | |
| 15 | H_a : height of ridge | H_b : height of protrusion |
| | H_c : height of small ridge | |
| | H_d, H_e : thickness of continuous layer | |
| | D_a : basal plane diameter of ridge | |
| | D_b : basal plane diameter of protrusion | |
| 20 | D_c : basal plane diameter of small ridge | |
| | P_a : pitch between ridges | |
| | P_b : pitch between protrusions | |
| | P_c : pitch between small ridges | |
| | 20: solar cell | 21: transparent insulating substrate |
| 25 | 22: transparent conductive film | 23: p-type-layer |
| | 24: i-type-layer | 25: n-type-layer |
| | 26: photoelectric conversion layer | |

- 27: rear face electrode
- 28: light
- 29: conductive wire
- 40: substrate for solar cell
- 41: contact-improving layer
- 5 42: p-i-n-type-layer of a-Si
- 43: rear face electrode
- 44: glass substrate
- 45: transparent conductive oxide film


【TYPE OF DOCUMENT】

DRAWING


【Fig. 1】

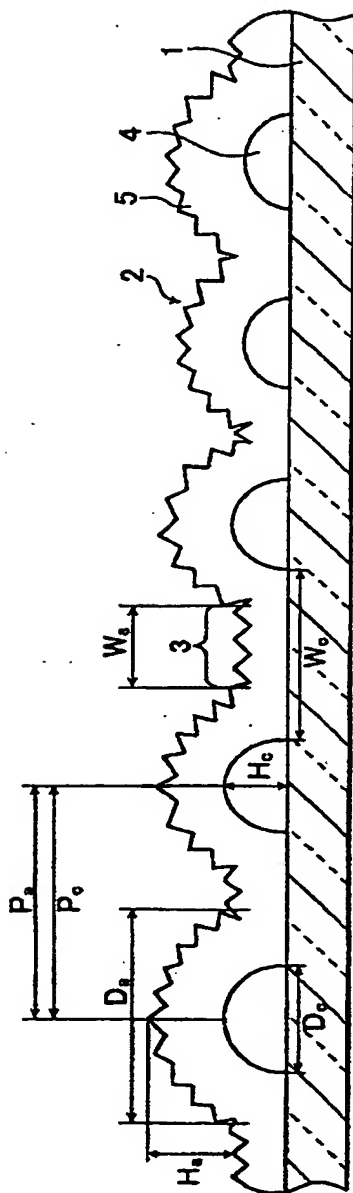


[Fig. 2]

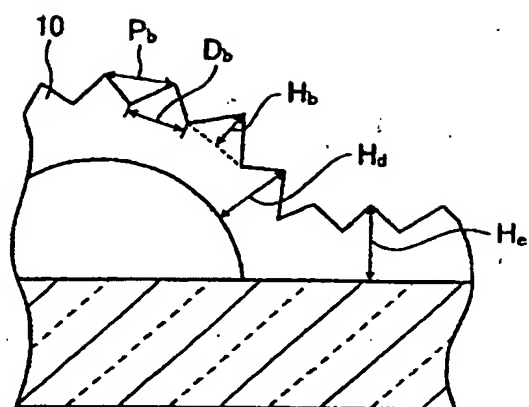


[Fig. 3]

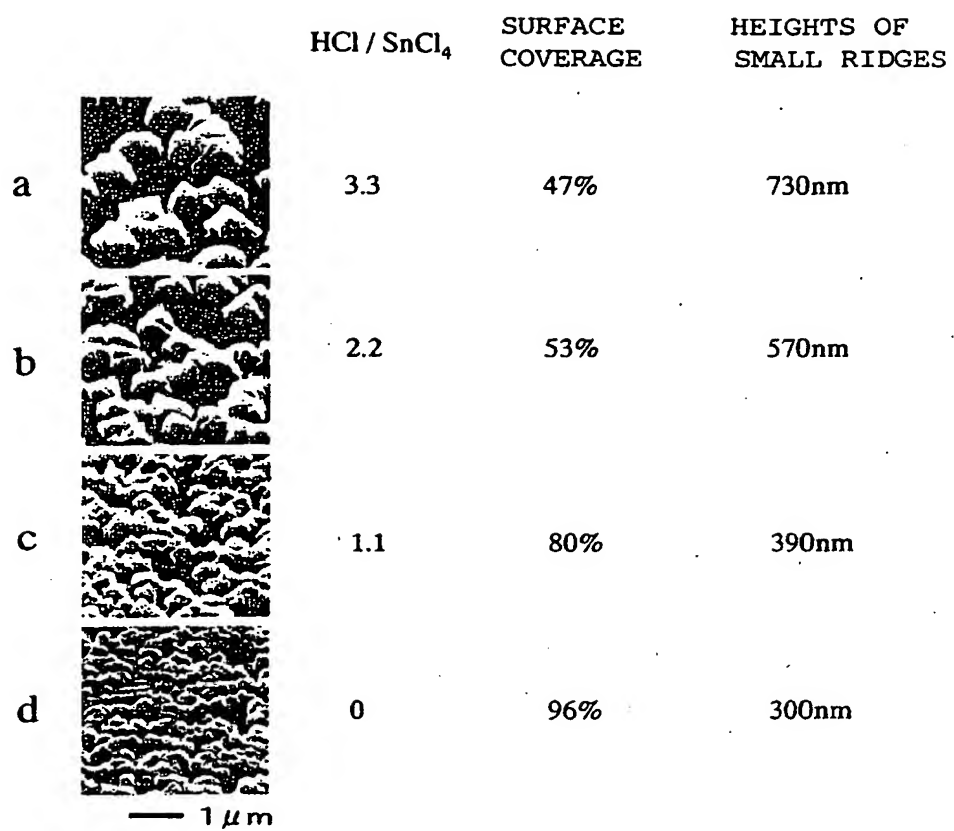

【Fig. 4】

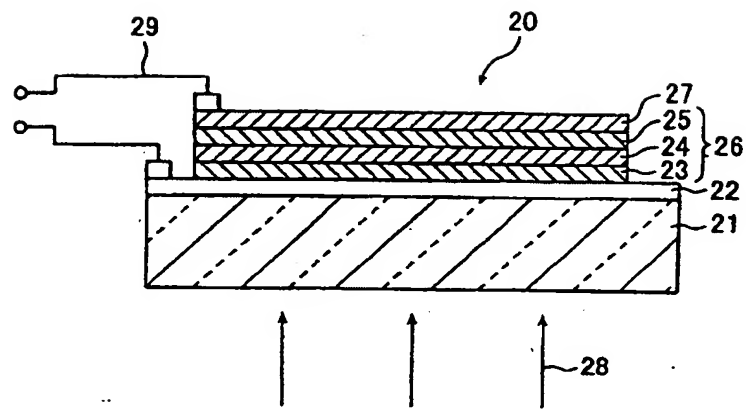


【Fig. 5】

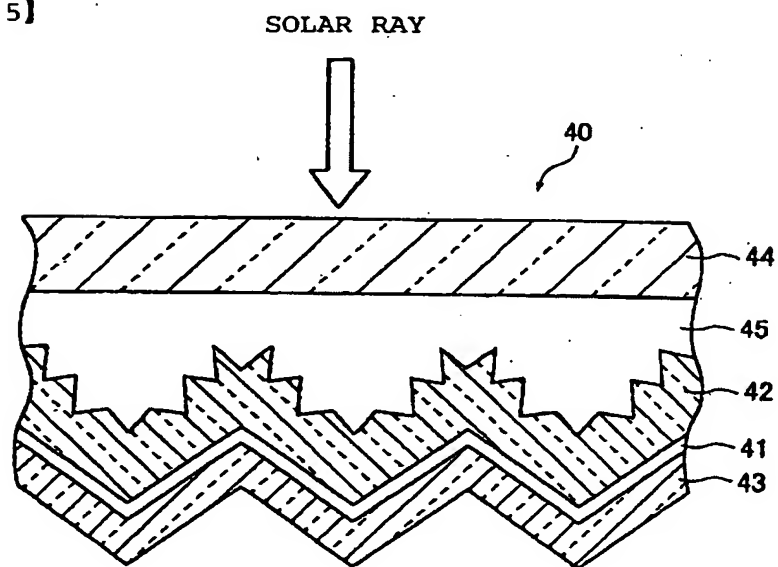

[Fig. 6]


A

1 μm

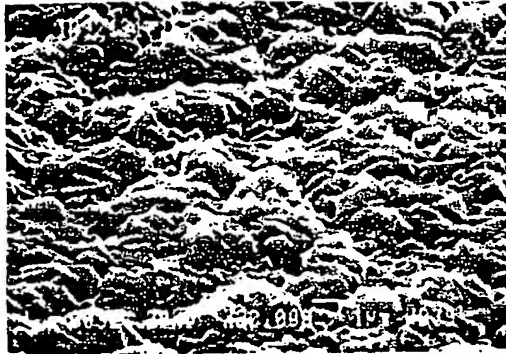

B

10 μm

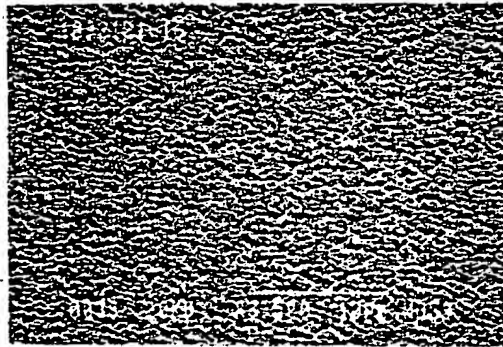

【Fig. 7】


A

1 μm




B

10 μm

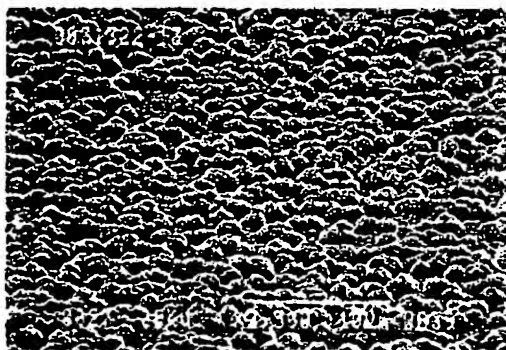

[Fig. 8]

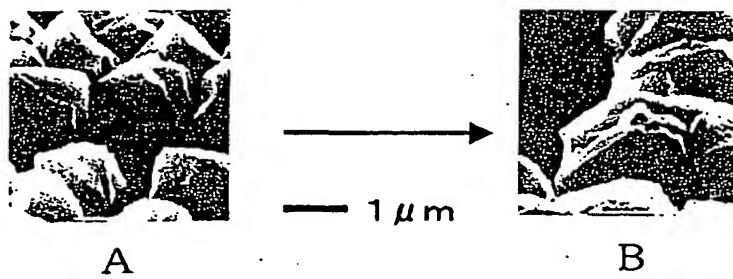

[TYPE OF DOCUMENT]

ABSTRACT

[SUMMARY]

[OBJECT]

It is to provide a substrate with a transparent
5 conductive oxide film (especially a substrate with a
transparent conductive oxide film useful as a substrate
for a thin-film silicon-based solar cell) being excellent
in mass production efficiency and being characterized by
having a low resistance, a high transparency and a good
10 light scattering performance over a full wavelength
region (300 nm to 3 μ m) of solar ray, a process for its
production, and a photoelectric conversion element
(especially, solar cell) employing the substrate.

[MEANS OF SOLVING PROBLEMS]

15 A substrate with a transparent conductive oxide film,
comprising a substrate and a transparent conductive oxide
layer formed on the substrate and constituted by a
plurality of ridges and a plurality of flat portions,
wherein the surfaces of the ridges and the flat portions,
20 have many continuous micron-size protrusions.

[SELECTED FIGURE] Fig. 1